

REFERENCE NOTES SCHEDULE	
SYM	DESCRIPTION
1	INSTALL ANGLED CONCRETE LANDSCAPE EDGING. SEE DETAIL.
2	INSTALL 4" DEPTH OF 2" UNCRUSHED RIVER ROCK OVER LANDSCAPE FABRIC. (MATCH EXISTING ROCK IN ECONOMY PARKING LOT ISLANDS)


- PLANTING NOTES**
- FINE GRADING SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO PLANTING OPERATIONS.
 - CONTRACTOR SHALL LAY OUT PLANT MATERIAL PER PLAN AND FACE TO GIVE BEST APPEARANCE OR RELATION TO ADJACENT PLANTS, STRUCTURES OR VIEWS. CONSULT WITH ENGINEER TO OBTAIN APPROVAL PRIOR TO INSTALLATION.
 - PLANT MATERIAL SHALL NOT BE INSTALLED IN AREAS WHICH WILL CAUSE HARM TO ADJACENT STRUCTURES OR OBSTRUCT IRRIGATION SPRAY PATTERN (IF APPLICABLE). NOTIFY THE OWNER SHOULD CONFLICTS ARISE.
 - PLANT LOCATIONS ARE DIAGRAMMATIC AND MAY BE ADJUSTED IN THE FIELD AT THE ENGINEER'S REQUEST PRIOR TO INSTALLATION.
 - FINISH GRADE OF PLANTING AREAS SHALL BE 2" BELOW ADJACENT PAVING. TAPER 4" DEPTH MULCH TOP DRESSING TO 1 1/2" DEPTH AT ADJACENT PAVING.
 - ALL NEWLY PLANTED MATERIAL SHALL BE THOROUGHLY SOAKED WITH WATER WITHIN 3 HOURS OF PLANTING. THOROUGHLY RE-SOAK ALL NEW PLANT MATERIALS ONE WEEK AFTER PLANTING COMPLETION.
 - THIRTY DAYS AFTER PLANTING, CONTRACTOR SHALL RE-STAKE AND STRAIGHTEN TREES AS REQUIRED.
 - CONTRACTOR SHALL THOROUGHLY LOOSEN ANY COMPACTED SUBGRADES PRIOR TO PLACING TOPSOIL, TO A MINIMUM DEPTH OF 4".
 - CONTRACTOR SHALL IMPORT CLEAN TOPSOIL FREE OF WEEDS, RHIZOMES, ROCKS, STICKS, AND OTHER DELETERIOUS MATERIAL. ENGINEER IS TO APPROVE TOPSOIL PRIOR TO INSTALLATION. CONTRACTOR SHALL BRING TO FINISH GRADE WITH 12" MIN. OF TOPSOIL IN ALL LAWN AREAS AND PLANTING BEDS.
 - CONTRACTOR SHALL REMOVE WEEDS, CONTAMINATED SOILS, MISC. WASTE MATERIALS FROM AREA TO BE PLANTED AND SEEDED/SODDED. CONTRACTOR SHALL LOOSEN COMPACTED SUBSOILS BY TILLING AND IMPORTING NEW TOPSOIL AS REQUIRED RESTORING GRADES AND MAINTAINING POSITIVE DRAINAGE AWAY FROM STRUCTURES.
 - DO NOT INSTALL PLANT MATERIAL WHEN AMBIENT TEMPERATURES MAY DROP BELOW 35 DEGREES F OR RISE ABOVE 90 DEGREES F. DO NOT INSTALL PLANT MATERIAL WHEN WIND VELOCITY EXCEEDS 30 MPH. ACCEPTABLE PLANTING DATES SHALL BE AS FOLLOWS:
 SPRING: APRIL 15 - JUNE 15
 FALL: SEPTEMBER 15 - NOVEMBER 1
 - WEED FABRIC (PER SPEC) SHALL BE INCLUDED UNDER ALL AREAS RECEIVING ROCK MULCHING.
 - ALL TREES LOCATED OUTSIDE OF A PLANTING BED TO RECEIVE 4" DEPTH OF SHREDDED HARDWOOD BARK MULCH 3 TIMES THE DIA. OF THE ROOTBALL UNLESS OTHERWISE NOTED. MULCH SHALL BE INCLUDED IN THE PRICE BID FOR EACH TREE.

PLANT SCHEDULE

TREES	QTY	COMMON NAME	BOTANICAL NAME	TYPE	CAL	HEIGHT	COMMENTS
AM	4	AMUR MAPLE	ACER GINNALA	CONT	1"Cal	5-6'	
DE	3	DISCOVERY ELM	ULMUS DAVIDIANA JAPONICA 'DISCOVERY'			CONT OR B & B	1.5"Cal 12-15'
SM	20	DWARF KOREAN LILAC	SYRINGA MEYERI 'PALIBIN'	#2 CONT.			
AD	20	ALLEMAN'S COMPACT DOGWOOD	CORNUS SERICEA 'ALLEMAN'S COMPACT'	#2 CONT.			

NOTE:
B&B = BALLED AND BURLAPPED

NOTE:
LANDSCAPE CONTRACTOR SHALL DETERMINE WHETHER AN EXISTING TREE THAT IS SCHEDULED FOR REMOVAL CAN BE SALVAGED AND REINSTALL ONE OR IF A NEW TREE WILL BE PLANTED.

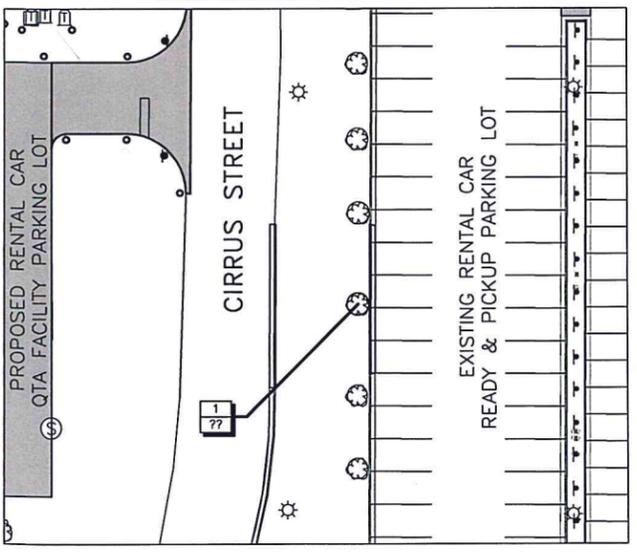

LEGEND


SYMBOL **DESCRIPTION**
Tree symbols vary, for species see schedule.

(1) Quantity
(A) Species, see schedule

ONE CALL BEFORE DIGGING
1-800-795-6555
CONTRACTOR TO LOCATE UTILITIES PRIOR TO PLANTING

APPROVED BY PLANNING
[Signature]
SENIOR PLANNER 09-24-15
TITLE DATE

APPROVED BY FORESTRY
[Signature]
LANDSCAPE ARCHITECT 09-24-15
TITLE DATE

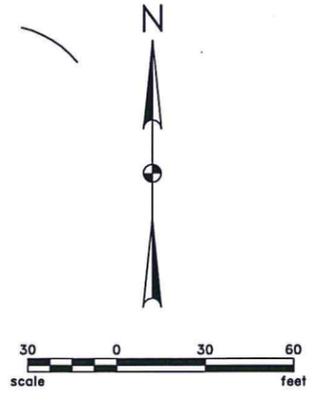

PRELIMINARY
NOT FOR
CONSTRUCTION

KLJ

Bismarck AIRPORT

RENTAL CAR QTA FACILITY
BISMARCK AIRPORT - CITY OF BISMARCK (OWNER)
BISMARCK, NORTH DAKOTA

LANDSCAPING LAYOUT PLAN & DETAILS

DRAFTED CAS
REVIEWED BRT
PROJECT NUMBER 1515707
LAST REVISED DATE 09/03/2015

SHEET **19**

© KLJ 2015

SP 2015-062