


GRAPHIC SCALE

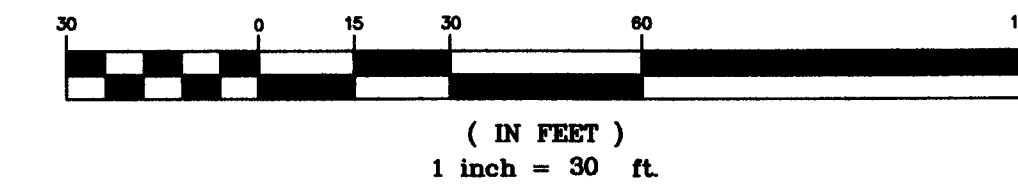

NOTES:

- 1 LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR AND SHALL MAINTAIN THE LANDSCAPING FOR 90 DAYS PAST THE FINAL INSPECTION.
- 2 GENERAL CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE (1) YEAR FROM DATE OF PROJECT SUBSTANTIAL COMPLETION.
- 3 ALL PLANT MATERIAL SHALL MEET MINIMUM REQUIREMENTS SHOWN IN THE "AMERICAN STANDARDS FOR NURSERY STOCK" (ANSI Z60.1-1990).
- 4 EACH TREE AND SHRUB SHALL BE SECURELY LABELED WITH A WATERPROOF TAG INDICATING BOTANICAL NAME AND COMMON NAME FOR DELIVERY TO SITE.
- 5 NO PLANT MATERIAL SHALL BE SUBSTITUTED WITHOUT THE APPROVAL OF THE OWNER. ALL PLANTING LOCATIONS FOR TREES AND SHRUBS SHALL BE FLAGGED BY THE CONTRACTOR AND APPROVED BY THE OWNER, PRIOR TO INSTALLATION.
- 6 ALL SHRUB AND TREE PLANTING AREAS SHALL BE EXCAVATED AND BACK-FILLED WITH PLANT MIX. PROVIDE FERTILIZER WITH NOT LESS THAN 5% NITROGEN, 10% AVAILABLE PHOSPHORIC ACID AND 5% SOLUBLE POTASH. DISCARD SUBSOIL REMOVED FROM PLANTING AREA EXCAVATION. DO NOT MIX WITH PLANT MIX OR USE AS BACK-FILL. SEE DETAILS FOR COMPLETE PLANTING PREPARATION. PREPARE PLANTING AREAS AND INSTALL PLANTS COMPLETELY, PRIOR TO SEEDING.
- 7 ALL SHRUBS SHALL BE INSTALLED IN PROPOSED PLANTING BEDS AND COVERED WITH SHREDDED BARK MULCH OR ACCEPTABLE MATERIAL.
- 8 SPACING SHOWN FOR PLANTS IS FOR INFORMATION ONLY AND SHALL BE ADJUSTED AS REQUIRED TO PROVIDE UNIFORM SPACING WITHIN THE PLANTING BEDS.

PROJECT:
VERAWAY APARTMENTS
BISMARCK, ND

CLIENT:
Enclave Properties
Attn: Ben Meland
325 7th Street South
Suite 300
Fargo, ND 58103
ph: 701.799.0376




CD	CONSTRUCTION DOCUMENTS	10/18/13
MARK	DESCRIPTION	DATE

All Rights Reserved.
All Bartlett & West plans, specifications and drawings are protected under copyright law, and no part may be copied, reproduced, displayed publicly, used to create derivatives, distributed, stored in a retrieval system or transmitted in any form by any means without prior written permission of Bartlett & West.

PROJECT NO:	18347.000
DRAWN BY:	MSG
CHECKED BY:	GJF
DRAWING TITLE:	LANDSCAPE PLAN

C4

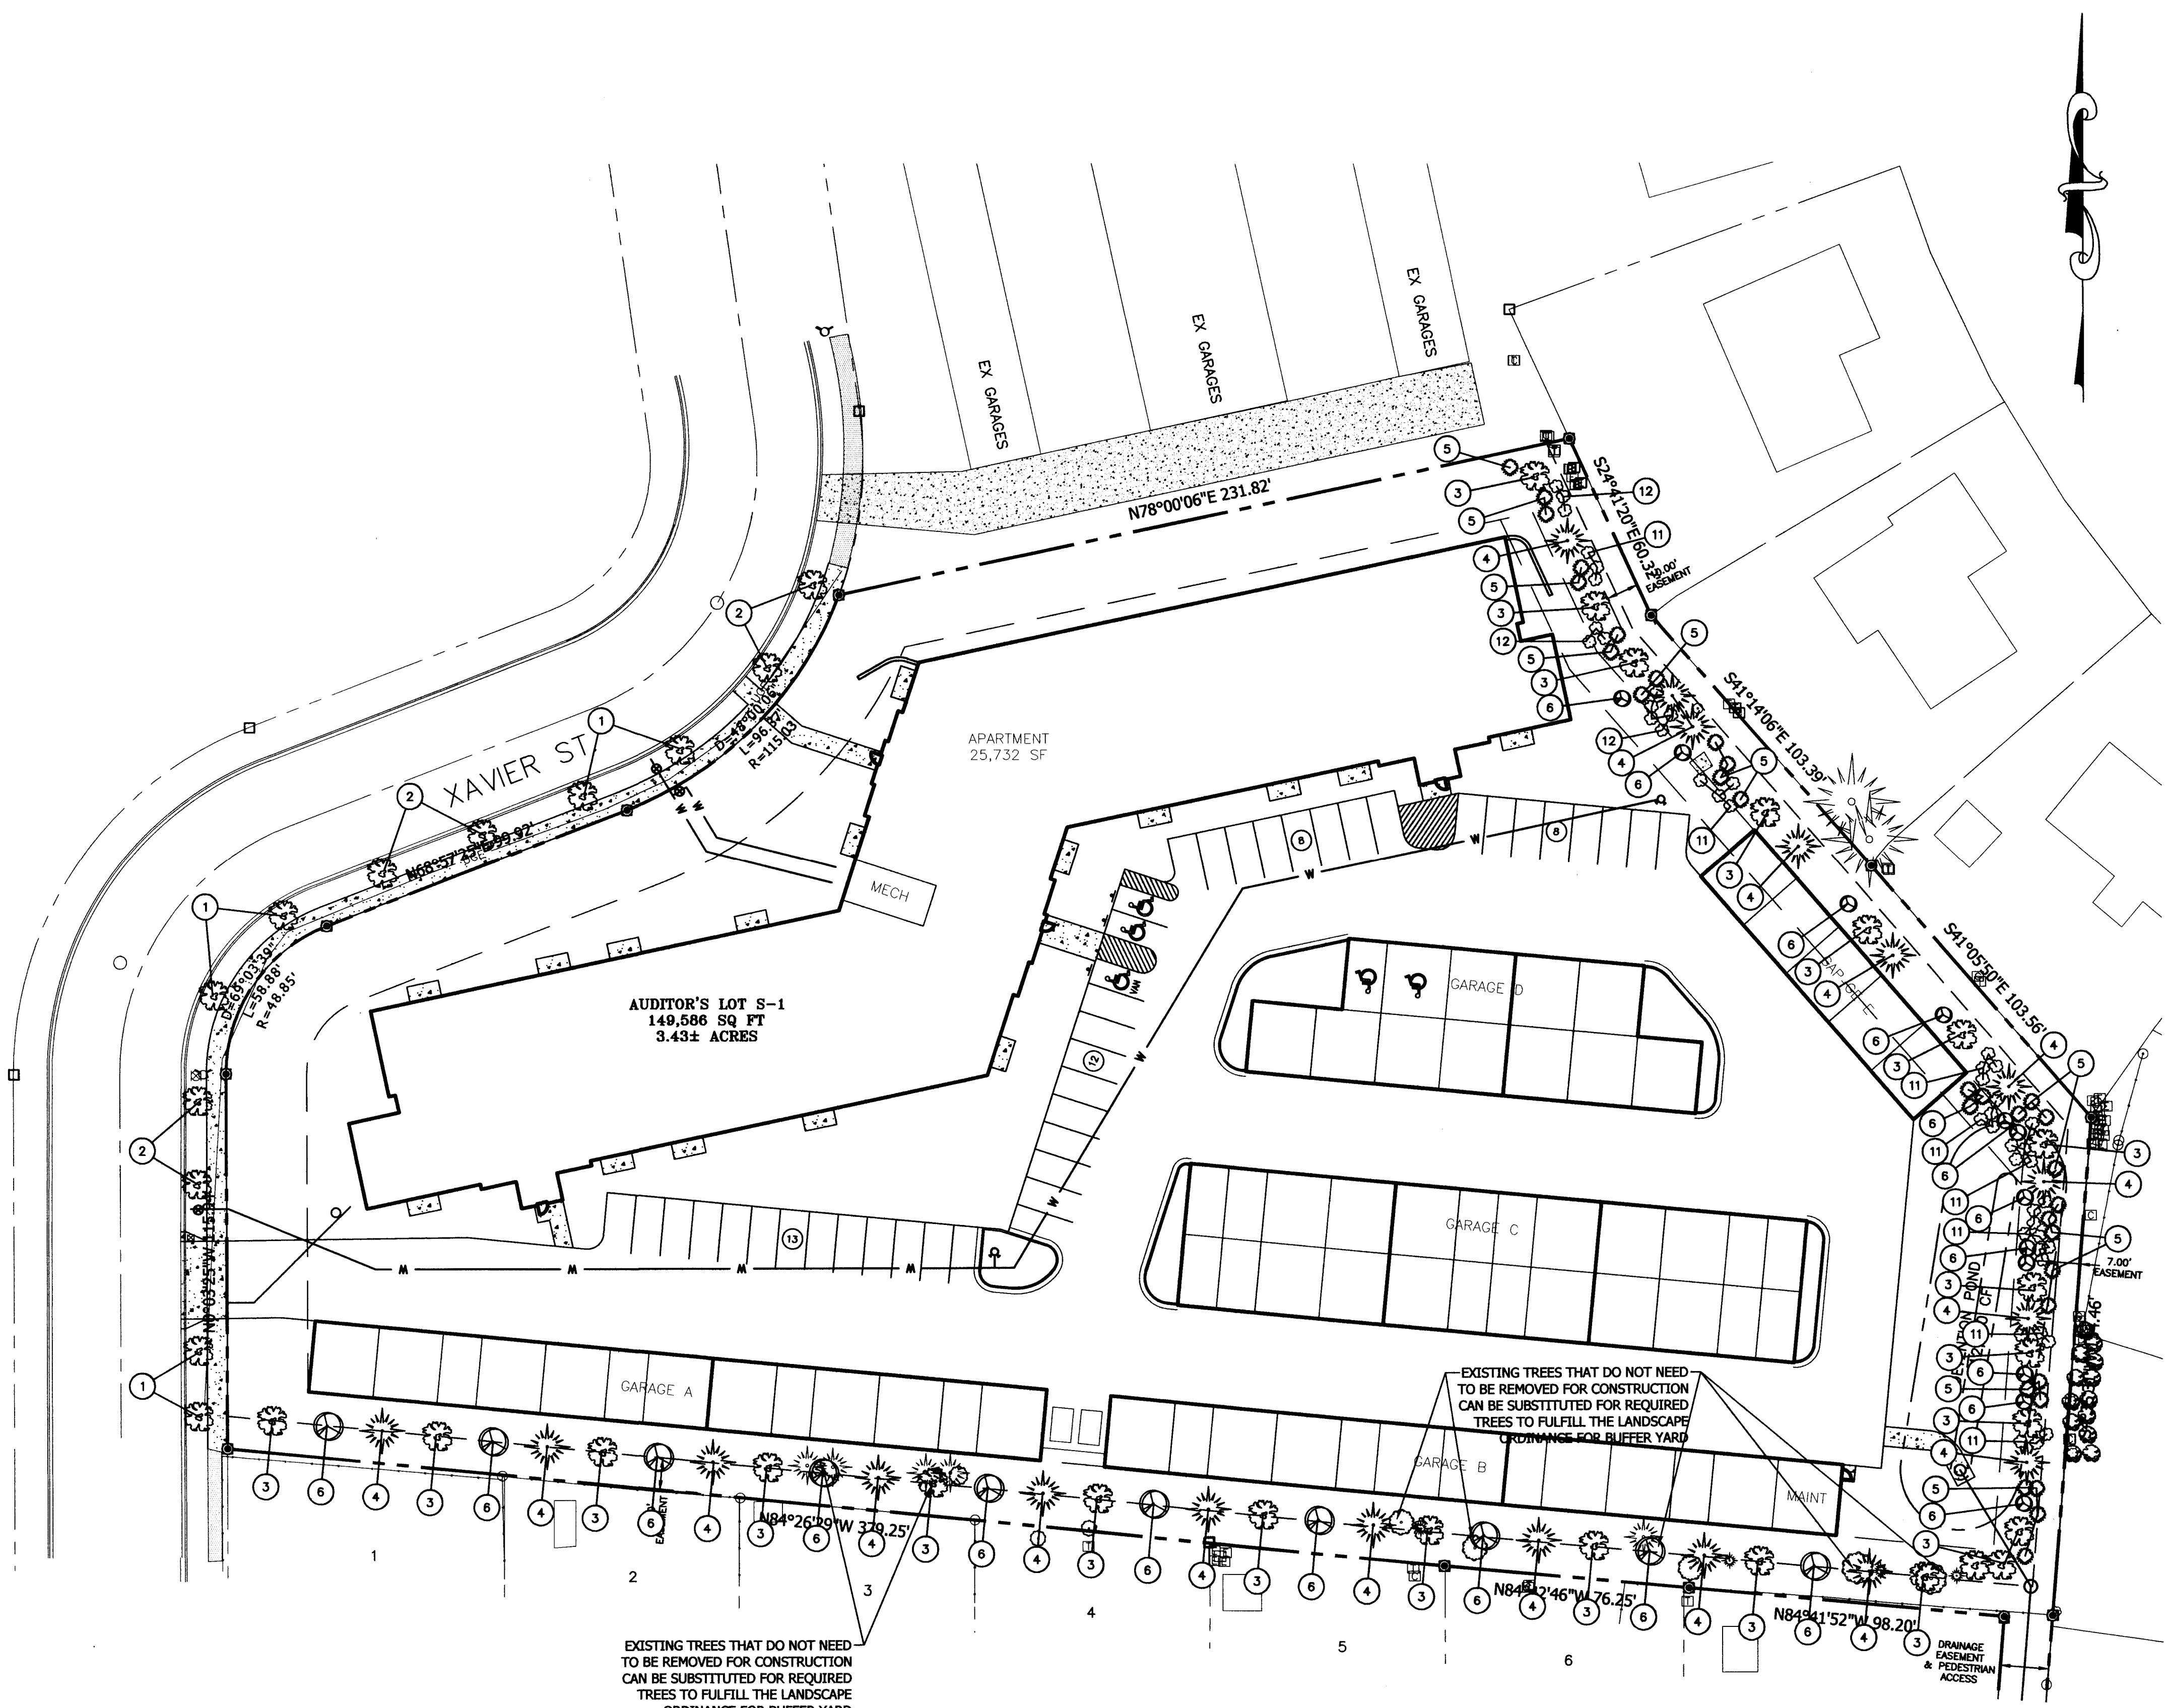

EXISTING TREES THAT DO NOT NEED TO BE REMOVED FOR CONSTRUCTION CAN BE SUBSTITUTED FOR REQUIRED TREES TO FULFILL THE LANDSCAPE ORDINANCE FOR BUFFER YARD


EXISTING TREES THAT DO NOT NEED TO BE REMOVED FOR CONSTRUCTION CAN BE SUBSTITUTED FOR REQUIRED TREES TO FULFILL THE LANDSCAPE ORDINANCE FOR BUFFER YARD

PLANTING SCHEDULE:

Key	Common Name	Botanical Name	Qty.	Size	Cond.
Trees					
1	Autumn Blaze Maple	Acer x freemanii 'Jeffersred'	6	2" cal. min.	B & B
2	American Linden	Tilia americana	6	2" cal. min.	B & B
3	Hackberry	Celtis occidentalis	24	2" cal. min.	B & B
4	Black Hills Spruce	Picea glauca densata	20	2" cal. min.	B & B
5	Techy Globe Arborvitae	Thuja occidentalis 'Techy Globe'	30	2" cal. min.	B & B
6	Tatarian Maple	Acer tataricum	23	2" cal. min.	B & B
Shrubs					
11	Yellow Flowering Forsythia 'Meadowlark'	Forsythia hybrids	30	2 gal.	Cont.
12	Dwarf Mugo Pine	Pinus mugo pumilio	14	2 gal.	Cont.


APPROVED BY PLANNING
[Signature]
PLANNER 10-21-13
TITLE DATE

APPROVED BY FORESTRY
[Signature]
10-21-13
TITLE DATE

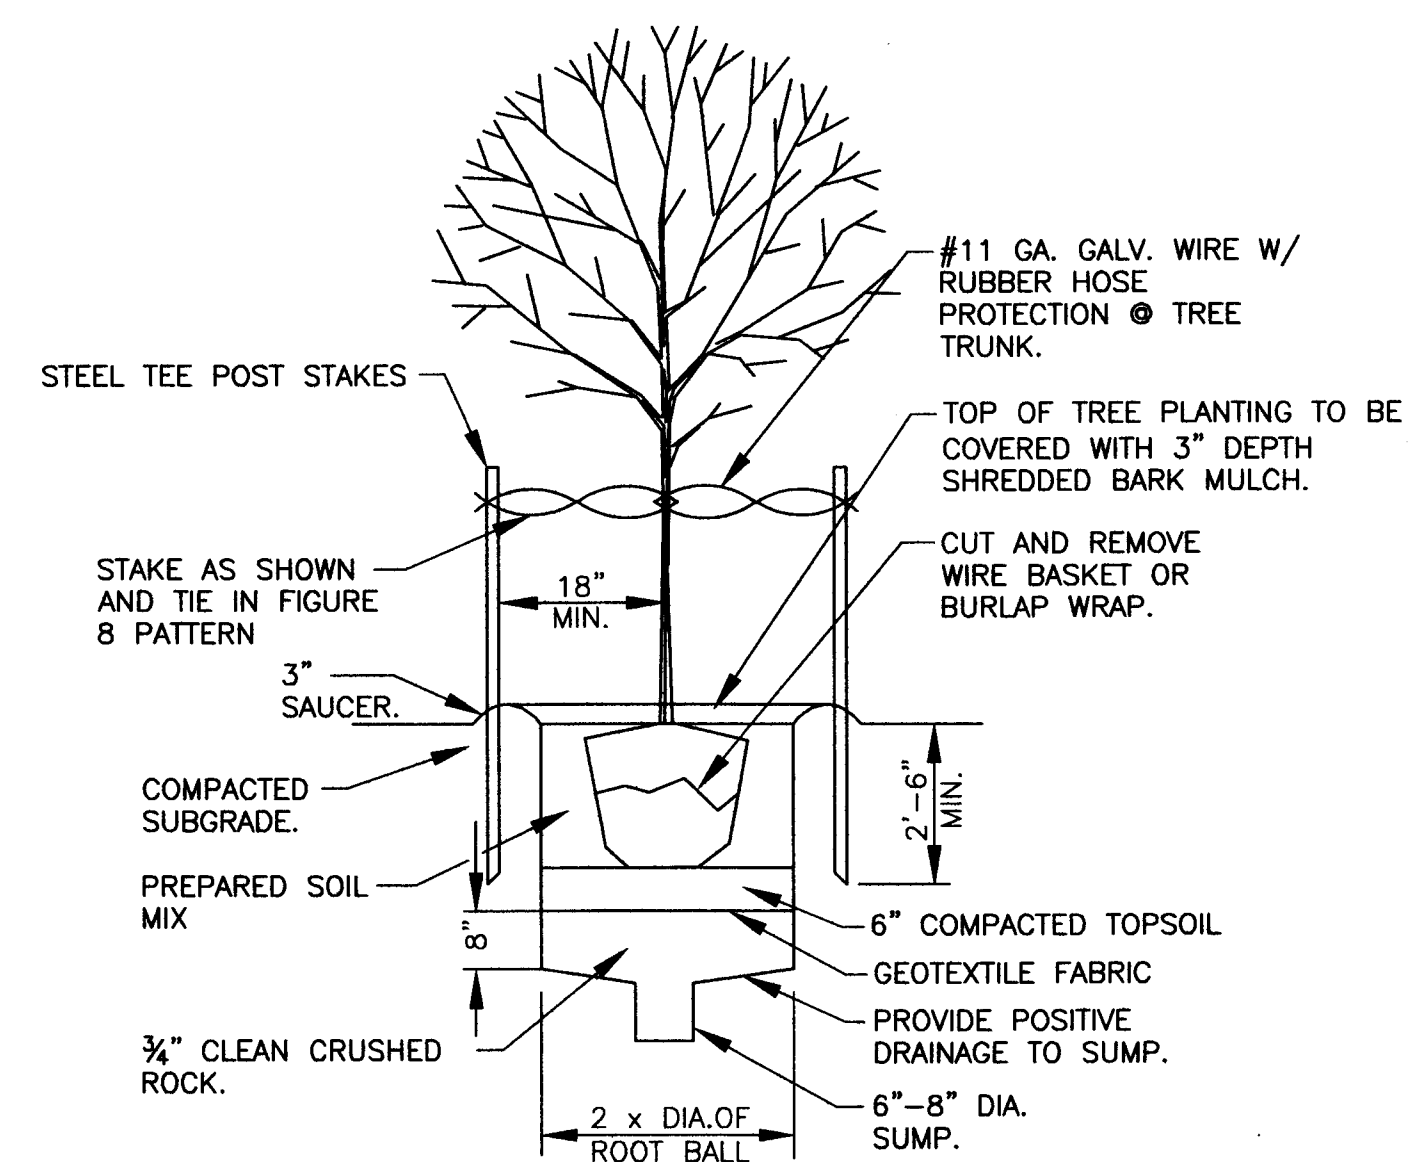

TREE PLANTING & STAKING DETAIL

NOT TO SCALE

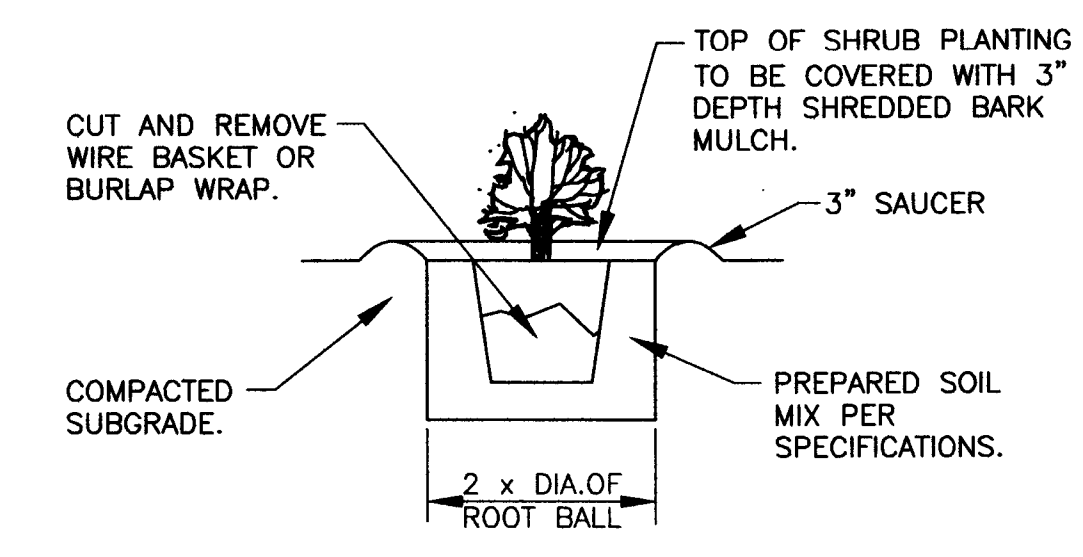

SHRUB PLANTING DETAIL

NOT TO SCALE